

DUZY Series

DUZY 2™ and DUZY 3™


Model	Log Size	Fuel Type	BTU Rating	Radiant Heat Output
VDY24/18	24"	NG	50,000	15,000
VDY24/18	24"	LP	50,000	15,000
VDY30	30"	NG	65,000	17,000
VDY30	30"	LP	65,000	17,000



Duzy 3

MINIMUM FIREBOX DIMENSIONS (inches)

Model	Back Width		Depth	Front Width	Min. Height
	A	B		C	
	Millivolt / Manual				
VDY24/18	18	17	13 1/2	26	16
VDY30	24	23	14	32	16

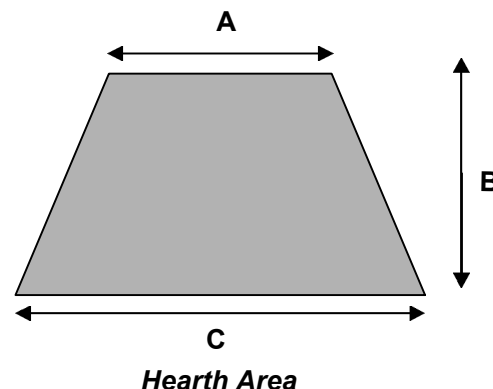

FEATURES:

- Up to 17,000 Btu of Radiant Heat.
- Realistic, advanced ceramic fiber gas logs.
- Manual Control with pilot and Millivolt Control.
- Factory-mounted and tested components - including valves, regulators, and safety pilots (where applicable).
- Lifetime Warranty on Logs.
- AGA/CSA Design Certified

IMPORTANT

This information is for planning purposes only. Always consult the Owner's Manual for installation and operating instructions.

Monessen vented gas logs are certified as decorative appliances to the ANSI Z21.60 standard. In independent testing conducted by a major research university, testing documented the radiant heat output of Monessen's vented logs utilizing advanced ceramic fiber logs and burner technology.

Warning:

- It is recommended that all installations be performed by qualified service technicians.
- The damper stop provided with this unit must be installed to prevent full closure of the fireplace damper blade and provide a minimum flue opening.
- Check local codes before installation to ensure compliance.
- It is recommended that a fireplace screen be used during operation of this log set. Always ensure the screen has adequate spaces to allow for passage of combustion air to the gas log set.
- Keep small children away from the open flame of the gas log set at all times.

Heat with Personality.