


AGA/CSA Series

Model	Log Size	Fuel Type	BTU Rating	Radiant Heat Output
VWF18	18"	NG	60,000	14,000
VWF18	18"	LP	60,000	14,000
VWF24	24"	NG	70,000	16,000
VWF24	24"	LP	60,000	14,000
VWF30	30"	NG	80,000	18,000
VWF30	30"	LG	60,000	14,000



MINIMUM FIREBOX DIMENSIONS (inches)

Model	Back Width A	Depth B	Front Width C
VWF18			
Manual	21	13	24
Millivolt	25	13 1/2	28
Hi/Lo Remote	25	13 1/2	28
VWF24			
Manual	27	13	30
Millivolt	31	13 1/2	34
Hi/Lo Remote	31	13 1/2	34
VWF30			
Manual	33	13	36
Millivolt	37	13 1/2	40
Hi/Lo Remote	37	13 1/2	40

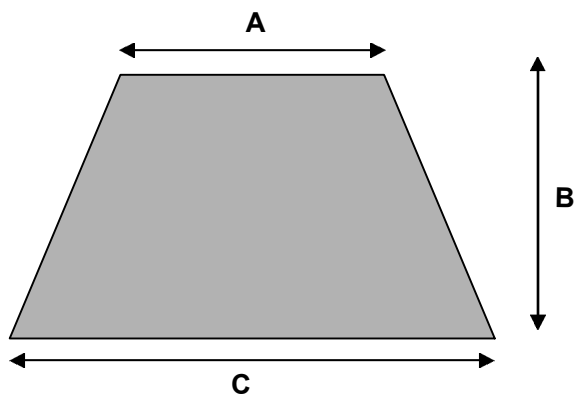

Hearth Area

FEATURES:

- Up to 18,000 Btu of Radiant Heat.
- Massive logs and natural yellow flames.
- Three sizes – 18", 24", or 30".
- Manual or Millivolt operation.
- Fiber Ceramic or Refractory Logs.
- Lifetime Warranty on Logs.
- AGA/CSA Design Certified.

IMPORTANT

This information is for planning purposes only. Always consult the Owner's Manual for installation and operating instructions.

Monessen vented gas logs are certified as decorative appliances to the ANSI Z21.60 standard. In independent testing conducted by a major research university, testing documented the radiant heat output of Monessen's vented logs utilizing advanced ceramic fiber logs and burner technology.

Warning:

- It is recommended that all installations be performed by qualified service technicians.
- The damper stop provided with this unit must be installed to prevent full closure of the fireplace damper blade and provide a minimum flue opening.
- Check local codes before installation to ensure compliance.
- It is recommended that a fireplace screen be used during operation of this log set. Always ensure the screen has adequate spaces to allow for passage of combustion air to the gas log set.
- Keep small children away from the open flame of the gas log set at all times.

Heat with Personality.


RADCO Series

Model	Log Size	Fuel Type	BTU Rating	Radiant Heat Output
VWF18	18"	NG	80,000	18,000
VWF18	18"	LP	60,000	14,000
VWF24	24"	NG	90,000	20,000
VWF24	24"	LP	60,000	14,000
VWF30	30"	NG	90,000	22,000
VWF30	30"	LG	60,000	14,000



MINIMUM FIREBOX DIMENSIONS (inches)

Model	Back Width A	Depth B	Front Width C
VWF18			
Manual	19	13	20
Manual SPK	21	13	24
Millivolt SPK	25	13 1/2	28
Hi/Lo Remote	25	13 1/2	28
VWF24			
Manual	25	13	26
Manual SPK	27	13	30
Millivolt SPK	31	13 1/2	34
Hi/Lo Remote	31	13 1/2	34
VWF30			
Manual	31	13	32
Manual SPK	33	13	36
Millivolt SPK	37	13 1/2	40
Hi/Lo Remote	37	13 1/2	40

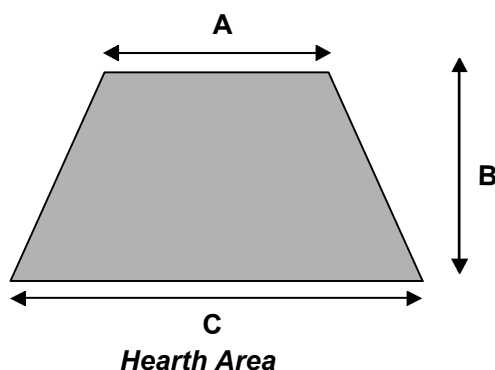

FEATURES:

- Up to 22,000 Btu of Radiant Heat.
- Massive logs and natural yellow flames.
- Three sizes – 18", 24", or 30".
- Manual or Millivolt operation.
- Optional safety pilot kit.
- Fiber Ceramic or Refractory Logs.
- RADCO Approved.

IMPORTANT

This information is for planning purposes only. Always consult the Owner's Manual for installation and operating instructions.

In independent testing conducted by a major research university, testing documented the radiant heat output of Monessen's vented logs utilizing advanced ceramic fiber logs and burner technology.

Warning:

- It is recommended that all installations be performed by qualified service technicians.
- The damper stop provided with this unit must be installed to prevent full closure of the fireplace damper blade and provide a minimum flue opening.
- Check local codes before installation to ensure compliance.
- It is recommended that a fireplace screen be used during operation of this log set. Always ensure the screen has adequate spaces to allow for passage of combustion air to the gas log set.
- Keep small children away from the open flame of the gas log set at all times.

Heat with Personality.