

The Vented Gas Logs that Heat!



DVB SERIES

SMARTFIRE™ TRIPLE Burner BTU RATINGS

Model	Log Size	Gas	Low	Medium	High
DVB20	20"	NG	21,000	32,000	48,000
DVB20	20"	LP	19,000	29,000	43,000
DVB24	24"	NG	24,000	37,000	55,000
DVB24	24"	LP	22,000	33,000	50,000
DVB24	28"	NG	24,000	37,000	55,000
DVB24	28"	LP	22,000	33,000	50,000



SMARTFIRE™ TRIPLE Burner RADIANT HEAT OUTPUT

Model	Log Size	Gas	Low	Medium	High
DVB20	20"	NG	7,000	9,000	9,000
DVB20	20"	LP	7,000	9,000	9,000
DVB24	24"	NG	9,000	12,000	12,000
DVB24	24"	LP	9,000	12,000	12,000
DVB24	28"	NG	9,000	12,000	12,000
DVB24	28"	LP	9,000	12,000	12,000

FEATURES:


Realistic, advanced ceramic fiber gas logs
Matchless, piezo ignition
Remote control capability
Safety Pilot System
Optional decorative ceramic fiber embers and cinders
AGA/CSA Design Certified

Minimum Firebox Dimensions (inches)

Refer to the drawing at right

Triple Burner

Log Size	A	B	C	Height Min.
20"	19	15	29	16
24"	23	15	33	16
28"	25	15	33	16

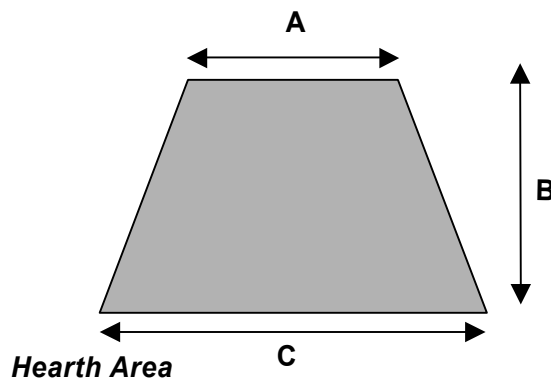

Warning:

- It is recommended that all installations be performed by qualified service technicians.
- The damper stop provided with this unit must be installed to prevent full closure of the fireplace damper blade and provide a minimum flue opening.
- Check local codes before installation to ensure compliance.
- It is recommended that a fireplace screen be used during operation of this log set. Always ensure the screen has adequate spaces to allow for passage of combustion air to the gas log set.
- Keep small children away from the open flame of the gas log set at all times.

IMPORTANT

This information is for planning purposes only. Always consult the Owner's Manual for installation and operating instructions.

Monessen vented gas logs are certified as decorative appliances to the ANSI Z21.60 standard. In independent testing conducted by a major research university, testing documented the radiant heat output of Monessen's vented logs utilizing advanced ceramic fiber logs and burner technology.

Heat with Personality.